

# 49/50

## 全金属软管 (单扣) Metal conduits (squared locked)

材质：镀锌铁皮 (单扣)


颜色：银色

温度：最高可达到 220°C

防护等级：IP40

特性：超柔软性与极佳弯曲性能，耐高温，可防温度极高的铁屑等

应用：各种机床，机械，电梯，石油，化工，智能楼宇综合布线，安防系统，室外照明，厂房等建筑之配线保护轨道交通，铁路设施等

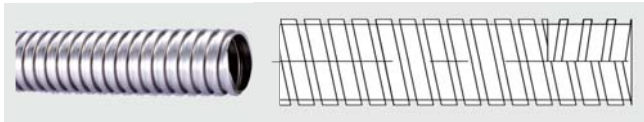

Material: Galvanized steel strip(squared locked)

Colour: Silver

Temperature range: Max to 220°C

Protection Degree: IP40

Properties: High flexibility, excellent bend ability, temperature-resistant, resistant to chips.

Applications: Various machine tools and machines, elevators, chemical industry. Cable protection in brainpower buildings threading, security system, exterior illumination, and workshop building.

软管尺寸 Conduit size	型号 Part no.	外径 (mm) OD	内径 (mm) ID	包装 (米 / 卷) Packing
1/4"	SC12	12.5	9.5	50
3/8"	SC16	15.7	12.5	50
1/2"	SC20	19.5	16.1	50
3/4"	SC25	24.3	20.8	40
1"	SC32	30.0	26.4	30
1 1/4"	SC40	38.0	34.5	30
1 1/2"	SC45	45.0	40.0	20
2"	SC57	57.0	51.0	10
2 1/2"	SC70	70.5	63.0	10
3"	SC85	83.0	76.5	10
4"	SC110	110.0	102.0	10

备注：可提供双扣型。Inter locked available

## 浪型金属软管 Liquid-tight metal conduits

材质：镀锌铁皮 (单扣)，外 PVC 被覆


颜色：黑色 / 灰色

温度：-25°C~+80°C，短时间 100°C

防护等级：IP65

特性：超柔软性与极佳弯曲性能，具有极佳的防水性，绝缘性，抗腐蚀性；表面加 PVC 被覆，具阻燃，抗 UV 抗老化。

应用：铁路，机车，交通系统工程，空调。各种机床，机械，自动控制设备，发电厂。石油，化工。输电能，通讯系统，基地台架式，船舶，大厦，厂房内及屋外露出部分之配线保护。

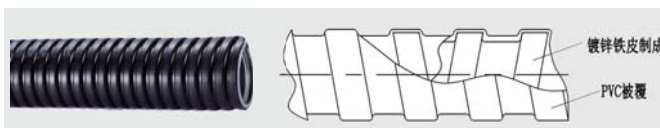

Material: Galvanized steel strip(square locked), PVC sheath

Colour: Black / Grey

Temperature range: -25°C~+80°C, short-term to 100°C

Protection Degree: IP65

Properties: High flexibility, excellent bend ability. High waterproof, insulated, chemical resistance. PVC sheath, fire resistance, uv-resistant, aging resistance.

Applications: Railway, vehicle, traffic system project air-condition. Various machine tool and machines. Automatic control equipment, electric power plants. Petroleum, chemical industry, transmission and distribution system, communication system, base station span. Cable protection in ships, buildings and plants.

软管尺寸 Conduit size	型号 Part no.	外径 (mm) OD	内径 (mm) ID	包装 (米 / 卷) Packing
1/4"	SPC12	13.2	9.5	50
3/8"	SPC16	16.6	12.5	50
1/2"	SPC20	20.5	16.1	50
3/4"	SPC25	25.5	20.8	40
1"	SPC32	31.6	26.4	30
1 1/4"	SPC40	39.6	34.5	30
1 1/2"	SPC45	46.8	40.0	20
2"	SPC57	58.6	51.0	10
2 1/2"	SPC70	73.5	63.0	10
3"	SPC85	85.5	76.5	10
4"	SPC110	112.5	102.0	10